



# Air and Inert Gas Non-Incendive Field Wiring Valves

Brass, Aluminum, or Stainless Steel Bodies  
1/4" to 1" NPT

2/2•3/2  
4/2•5/2•5/3  
SERIES  
NIFW

## Features

- NIFW solenoid enclosures to provide corrosion resistance in harsh environments
- Designed solely for installation in non-incendive field wiring areas, with properly approved and sized current and voltage-limiting safety barriers
- Acceptable for use in hazardous locations, as classified by the National Electrical Code: Classes I, II, and III, Division 2, including Groups A through G
- Electronically enhanced solenoids have efficient cartridge operators and nonpolarized coils
- Triple redundant diodes prevent electrical pulse from flowing back into the hazardous area
- Mountable in any position

## Solenoid Operators

**WBEE:** Watertight, Type 3, 3S, 4, 4X, IP-67. Liquid Crystal Polymer (LCP) overmolded with 1/2" NPT conduit connection and screw terminals for simple wiring. The terminal block will accommodate 18 gage (AWG) wire, and grounding screw is located inside the enclosure.

## Solenoid Construction

Gasket Cover	NBR
Cover Screw	18-8 Stainless Steel
Cover Screw Gasket	NBR
Sleeve	430F Stainless Steel
Nameplate	Stainless Steel
Burp Cap Assembly	PA/CR

## Valve Construction

Valve Parts in Contact with Fluids			
Body	Aluminum	Brass	Stainless Steel
Seals and Discs	PUR, NBR, FKM, CR, as listed		
Sleeve	304L Stainless Steel		
Core and Plugnut	430F Stainless Steel		
Core Springs	302 Stainless Steel		
Pilot Seat Cartridge (Series 8316 & 8344 only)	CA		
Rider Rings	PTFE		
Spring Retainer	CA		

## Electrical

Nominal Wattage is 0.35 @ 24 VDC  
 Maximum Allowable "Off" State Current to the valves must be less than 1 mA.  
**Electronically Enhanced Solenoid:**  
 Maximum Capacitor Charge Time — 1 second  
 Minimum Time between Cycles — 1 second  
 Minimum Drop Current to Reset Electronic Coil — 2 mA  
 Nominal Temperature Rise at 24 VDC and 300 Ohms — 2°C (36°F)  
 Maximum Recommended Wire Run (#18 Wire) — 1.5 miles from barrier to valve  
**Important:** Minimum series resistance of 200 ohms required in wiring circuit if a safety barrier is not used for non-"IS" system.



## Ordering Information

The LCP NIFW solenoid enclosure is designated by the prefix "WBEE". **Example:** WBEE8314A300  
**Spare Coil P/Ns:** WBEE: 290209-001\*

## Nominal Ambient Temp. Ranges

Series	Body Material	Temperature Range
8551/8553	Aluminum	5°F to 140°F (-15°C to 60°C)
8262	Brass & Stainless Steel	-40°F to 140°F (-40°C to 60°C)
8314		
8317		
8551		
8551/8553	Misc.	32°F to 140°F (0°C to 60°C)
8316 Suffix V All Other		-4°F to 140°F (-20°C to 60°C)

## Approvals

FM approved under J.I.3W8A8. AX (3610).  
 NIFW/I, II, III/2/ABCDEF/G/T6 Ta = 60°C;  
 -V9536;ENTITY;Type 4X;  
 CSA certified under File LR-13976-116C.  
 NIFW/II/2/ABCD/T6 Ta = 60°C;  
 -V9536;ENTITY;Type 4X;  
 Meets applicable CE directives.  
*Refer to Engineering Section for details.*

## Important

These solenoids are intended for use on clean, dry air or inert gas filtered to 50 micrometers or better. To prevent freezing, the dew point of the media should be at least 18°F (-8°C) below the minimum temperature to which any portion of the clean air or gas system could be exposed. Instrument air in compliance with ANSI/ISA Standard S7.3-1975 (R1981) exceeds the above requirements and is, therefore, an acceptable medium for these valves.

## Maximum Entity Parameters

Entity	Groups A-D	Groups C-D
Parameters	V max - 30 VDC	V max - 34 VDC
	I max - 100 mA	I max - 125 mA
	Capacitance = 0	Capacitance = 0
	Inductance = 0	Inductance = 0

**Standard Voltage:** 24 VDC only (±10%)

**Minimum Operating Current:** 0.028 amps

SPECIAL SERVICE PILOT

### Specifications (English units)

2/2 VALVES, NORMALLY CLOSED, with NBR Disc										
Pipe Size (ins.)	Orifice Size (ins.)	Cv Flow Factor		Operating Pressure Differential (psi)		Max. Fluid and Ambient Temp. °F	Brass Body		Stainless Steel Body	
				Air-Inert Gas			Catalog Number	Const. Ref.	Catalog Number	Const. Ref.
				Min.	Max.					
1/4	1/16	.08		0	150	140	WBEE8262A320	1	WBEE8262A386	1A
3/8	5/16	1.5		10	150	140	WBEE8223A323	2	-	-
1/2	3/8	3.2		25	150	140	WBEE8223A303	3	WBEE8223A310	3
3/2 VALVES										
Pipe Size (ins.)	Orifice Size (ins.)	Cv Flow Factor		Operating Pressure Differential (psi)		Max. Fluid and Ambient Temp. °F	Brass Body		Stainless Steel Body	
				Air-Inert Gas			Catalog Number	Const. Ref.	Catalog Number	Const. Ref.
				Pressure to Cylinder	Cylinder to Exhaust					
UNIVERSAL OPERATION (Pressure at any port) with NBR Disc										
1/4	1/16	.08	.08	0	150	140	WBEE8314A300	4	WBEE8314A301	4A
NORMALLY CLOSED (Closed when de-energized)										
1/4	5/16	1.5	1.5	ⓐ	150	140	WBEE8316A301 ③	5	WBEE8316A381V ⑤	8
3/8	5/16	1.8	1.8	ⓐ	150	140	WBEE8316A302 ③	5	WBEE8316A382V ⑤	8
3/8	5/8	4	4	ⓐ	150	140	WBEE8316A303 ③	6	-	-
1/2	5/8	4	4	ⓐ	150	140	WBEE8316A304 ③	6	WBEE8316A384V ⑤	9
3/4	11/16	5.5	5.5	10	150	140	WBEE8316A374 ③	7	-	-
1	1	13	13	10	150	140	WBEE8316A334 ③	7A	-	-
UNIVERSAL OPERATION (Normally Closed or Normally Open) "Quick Exhaust" with CR Diaphragm and NBR Disc										
1/4	②	.08	.73	5	150	140	WBEE8317A307 ①	10	WBEE8317A308 ①	11
4/2 VALVES, with NBR Disc and Seal										
1/4	1/16	.08	.08	10	150	140	WBEE8345A301 ①③	12	WBEE8345A381 ①③	12
4/2 VALVES, Brass Body with NBR Disc										
							Single Solenoid	Const. Ref.	Dual Solenoid	Const. Ref.
1/4	1/4	.80	1	10	150	140	WBEE8344A370 ①③	13	WBEE8344A344 ③	16
3/8	3/8	1.4	2.2	10	150	140	WBEE8344A372 ①③	14	WBEE8344A380 ③	17
1/2	3/8	1.4	2.2	10	150	140	WBEE8344A374 ①③	14	WBEE8344A382 ③	17
3/4	3/4	5.2	5.6	10	150	140	WBEE8344A376 ①③	15	WBEE8344A354 ③	18
1	3/4	5.2	5.6	10	150	140	WBEE8344A378 ①③	15	WBEE8344A356 ③	18
① There are two exhaust flows in the exhaust mode (pilot and main). The pilot exhaust must be connected to the main exhaust when the air or inert gas can not be exhausted to the atmosphere. ② For "Quick Exhaust" valves, pressure port is 1/16", exhaust port is 1/4". ③ <b>IMPORTANT:</b> A minimum operating pressure differential must be maintained between the pressure and exhaust ports. Supply and exhaust piping must be full area, unrestricted. ASCO flow controls and other similar components must be installed in the cylinder lines only.						⑤ Diaphragm and main disc FKM only (pilot is low-temperature NBR). ⑥ Zero minimum when valve selection gasket is in external position and proper auxiliary air pressure is applied. See chart on page 136 for auxiliary pressure vs. mainline pressure. Minimum 15 psi Operating Pressure Differential when selection gasket is in the internal position.				

SPECIAL SERVICE PILOT



2/2•3/2  
4/2•5/2•5/3  
SERIES  
NIFW

## Specifications (English units)

Body Material	Pipe Size (ins.)	Orifice Size (ins.)	Cv Flow Factor	Single Solenoid					Dual Solenoid				
				Operating Pressure Differential (psi)		Max. Fluid Temp. °F	Catalog Number	Const. Ref.	Operating Pressure Differential (psi)		Max. Fluid Temp. °F	Catalog Number	Const. Ref.
				Air-Inert Gas					Air-Inert Gas				
				Min.	Max.	Min.	Max.						
<b>3/2, 5/2, 5/3 VALVES, with NBR and PUR Seals</b>													
Aluminum 3/2	1/4	1/4	.86	30	150	140	WBEE8551A305	19	30	150	140	WBEE8551A306	19
Aluminum 5/2							WBEE8551A317	20				WBEE8551A318	20
Aluminum 5/3 Center Closed							-	-				WBEE8551A367	20
Aluminum 5/3 Center Open							-	-				WBEE8551A368	20
Brass 3/2							WBEE8551A307	19				WBEE8551A308	19
Brass 5/2							WBEE8551A319	20				WBEE8551A320	20
316L Stainless Steel 3/2							WBEE8551A313 ②	19				WBEE8551A314 ②	19
316L Stainless Steel 5/2							WBEE8551A321 ②	20				WBEE8551A322 ②	20
Aluminum 3/2	1/2	1/2	3.7	30	150	140	WBEE8553A305	19	30	150	140	WBEE8553A306	19
Aluminum 5/2							WBEE8553A317	20				WBEE8553A318	20
316L Stainless Steel 3/2							WBEE8553A313 ②	19				WBEE8553A314 ②	19
316L Stainless Steel 5/2							WBEE8553A321 ②	20				WBEE8553A322 ②	20

Body Material	Pipe Size (ins.)	Orifice Size (ins.)	Cv Flow Factor	Single Solenoid					Dual Solenoid				
				Operating Pressure Differential (psi)		Max. Fluid Temp. °F	Catalog Number	Const. Ref.	Operating Pressure Differential (psi)		Max. Fluid Temp. °F	Catalog Number	Const. Ref.
				Air-Inert Gas					Air-Inert Gas				
				Min.	Max.	Min.	Max.						
<b>3/2, 5/2, 5/3 VALVES, with NBR and PUR Seals, NAMUR Mount</b>													
Aluminum 3/2, 5/2	1/4	1/4	.86	30	150	140	WBEE8551A301 ①	21	30	150	140	WBEE8551A302 ①	21
Aluminum 5/3 Center Closed							-	-				WBEE8551A365	22
Aluminum 5/3 Center Open							-	-				WBEE8551A366	22
Brass 3/2, 5/2							WBEE8551A303 ①	21				WBEE8551A304 ①	21
316L Stainless Steel 3/2, 5/2	1/2	1/2	3.7	30	150	140	WBEE8551A309 ②	22	30	150	140	WBEE8551A310 ②	22
Aluminum 3/2, 5/2							WBEE8553A301	22				WBEE8553A302	22
316L Stainless Steel 3/2, 5/2							WBEE8553A309 ②	22				WBEE8553A310 ②	22

① 1/8" NPT exhaust for 1/4" aluminum and brass. ② Can be used for *dry* natural gas service.

SPECIAL SERVICE  
PILOT

## Specifications (Metric units)

2/2 VALVES, NORMALLY CLOSED, with NBR Disc										
Pipe Size (ins.)	Orifice Size (mm)	Kv Flow Factor (m <sup>3</sup> /h)		Operating Pressure Differential (bar)		Max. Fluid and Ambient Temp. °C	Brass Body		Stainless Steel Body	
				Air-Inert Gas			Catalog Number	Const. Ref.	Catalog Number	Const. Ref.
				Min.	Max.					
1/4	1	.07		0	10.3	60	WBEE8262A320	1	WBEE8262A386	1A
3/8	8	1.29		0.7	10.3	60	WBEE8223A323	2	-	-
1/2	10	2.74		1.7	10.3	60	WBEE8223A303	3	WBEE8223A310	3
3/2 VALVES										
Pipe Size (ins.)	Orifice Size (mm)	Kv Flow Factor (m <sup>3</sup> /h)		Operating Pressure Differential (bar)		Max. Fluid and Ambient Temp. °C	Brass Body		Stainless Steel Body	
				Air-Inert Gas			Catalog Number	Const. Ref.	Catalog Number	Const. Ref.
				Pressure to Cylinder	Cylinder to Exhaust					
UNIVERSAL OPERATION (Pressure at any port) with NBR Disc										
1/4	2	.08	.08	0	10.3	60	WBEE8314A300	4	WBEE8314A301	4A
NORMALLY CLOSED (Closed when de-energized)										
1/4	8	1.29	1.29	ⓐ	10.3	60	WBEE8316A301 ③	5	WBEE8316A381V ⑤	8
3/8	8	1.37	1.37	ⓐ	10.3	60	WBEE8316A302 ③	5	WBEE8316A382V ⑤	8
3/8	16	3.43	3.43	ⓐ	10.3	60	WBEE8316A303 ③	6	-	-
1/2	16	3.43	3.43	ⓐ	10.3	60	WBEE8316A304 ③	6	WBEE8316A384V ⑤	9
3/4	17	4.7	4.7	0.7	10.3	60	WBEE8316A374 ③	7	-	-
1	25	11.14	11.14	0.7	10.3	60	WBEE8316A334 ③	7A	-	-
UNIVERSAL OPERATION (Normally Closed or Normally Open) "Quick Exhaust" with CR Diaphragm and NBR Disc										
1/4	②	.07	.63	0.3	10.3	60	WBEE8317A307 ①	10	WBEE8317A308 ①	11
4/2 VALVES, with NBR Disc and Seal										
1/4	2	.07	.07	0.7	10.3	60	WBEE8345A301 ①③	12	WBEE8345A381 ①③	12
4/2 VALVES, Brass Body with NBR Disc										
							<b>Single Solenoid</b>	<b>Const. Ref.</b>	<b>Dual Solenoid</b>	<b>Const. Ref.</b>
1/4	6	.69	.86	0.7	10.3	60	WBEE8344A370 ①③	13	WBEE8344A344 ③	16
3/8	10	1.89	2.2	0.7	10.3	60	WBEE8344A372 ①③	14	WBEE8344A380 ③	17
1/2	10	1.89	2.2	0.7	10.3	60	WBEE8344A374 ①③	14	WBEE8344A382 ③	17
3/4	19	4.80	5.6	0.7	10.3	60	WBEE8344A376 ①③	15	WBEE8344A354 ③	18
1	19	4.80	5.6	0.7	10.3	60	WBEE8344A378 ①③	15	WBEE8344A356 ③	18
① There are two exhaust flows in the exhaust mode (pilot and main). The pilot exhaust must be connected to the main exhaust when the air or inert gas can not be exhausted to the atmosphere.						⑤ Diaphragm and main disc FKM only (pilot is low-temperature NBR).				
② For "Quick Exhaust" valves, pressure port is 1/16", exhaust port is 1/4".						⑥ Zero minimum when valve selection gasket is in external position and proper auxiliary air pressure is applied. See chart on page 136 for auxiliary pressure vs. mainline pressure. Minimum 1 bar Operating Pressure Differential when selection gasket is in the internal position.				
③ <b>IMPORTANT:</b> A minimum operating pressure differential must be maintained between the pressure and exhaust ports. Supply and exhaust piping must be full area, unrestricted. ASCO flow controls and other similar components must be installed in the cylinder lines only.										

SPECIAL SERVICE PILOT

## Specifications (Metric units)

Body Material	Pipe Size (ins.)	Orifice Size (mm)	Kv Flow Factor	Single Solenoid					Dual Solenoid				
				Operating Pressure Differential (bar)		Max. Fluid Temp. °C	Catalog Number	Const. Ref.	Operating Pressure Differential (bar)		Max. Fluid Temp. °C	Catalog Number	Const. Ref.
				Air-Inert Gas					Air-Inert Gas				
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.						
<b>3/2, 5/2, 5/3 VALVES, with NBR and PUR Seals</b>													
Aluminum 3/2	1/4	6	.7	2	10	60	WBEE8551A305	19	2	10	60	WBEE8551A306	19
Aluminum 5/2							WBEE8551A317	20				WBEE8551A318	20
Aluminum 5/3 Center Closed							-	-				WBEE8551A367	20
Aluminum 5/3 Center Open							-	-				WBEE8551A368	20
Brass 3/2							WBEE8551A307	19				WBEE8551A308	19
Brass 5/2							WBEE8551A319	20				WBEE8551A320	20
316L Stainless Steel 3/2							WBEE8551A313 ②	19				WBEE8551A314 ②	19
316L Stainless Steel 5/2	WBEE8551A321 ②	20	WBEE8551A322 ②	20									
Aluminum 3/2	1/2	13	3.7	2	10	60	WBEE8553A305	19	2	10	60	WBEE8553A306	19
Aluminum 5/2							WBEE8553A317	20				WBEE8553A318	20
316L Stainless Steel 3/2							WBEE8553A313 ②	19				WBEE8553A314 ②	19
316L Stainless Steel 5/2							WBEE8553A321 ②	20				WBEE8553A322 ②	20


Body Material	Pipe Size (ins.)	Orifice Size (mm)	Kv Flow Factor	Single Solenoid					Dual Solenoid				
				Operating Pressure Differential (bar)		Max. Fluid Temp. °C	Catalog Number	Const. Ref.	Operating Pressure Differential (bar)		Max. Fluid Temp. °C	Catalog Number	Const. Ref.
				Air-Inert Gas					Air-Inert Gas				
Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.						
<b>3/2, 5/2, 5/3 VALVES, with NBR and PUR Seals, NAMUR Mount</b>													
Aluminum 3/2, 5/2	1/4	6	.7	2	10	60	WBEE8551A301 ①	21	2	10	60	WBEE8551A302 ①	21
Aluminum 5/3 Center Closed							-	-				WBEE8551A365	22
Aluminum 5/3 Center Open							-	-				WBEE8551A366	22
Brass 3/2, 5/2							WBEE8551A303 ①	21				WBEE8551A304 ①	21
316L Stainless Steel 3/2, 5/2	1/2	13	3.7	2	10	60	WBEE8551A309 ②	22	2	10	60	WBEE8551A310 ②	22
Aluminum 3/2, 5/2							WBEE8553A301	22				WBEE8553A302	22
316L Stainless Steel 3/2, 5/2							WBEE8553A309 ②	22				WBEE8553A310 ②	22

① 1/8" NPT exhaust for 1/4" aluminum and brass. ② Can be used for *dry* natural gas service.


SPECIAL SERVICE  
PILOT

Dimensions: inches (mm)

Const. Ref. 1, 1A

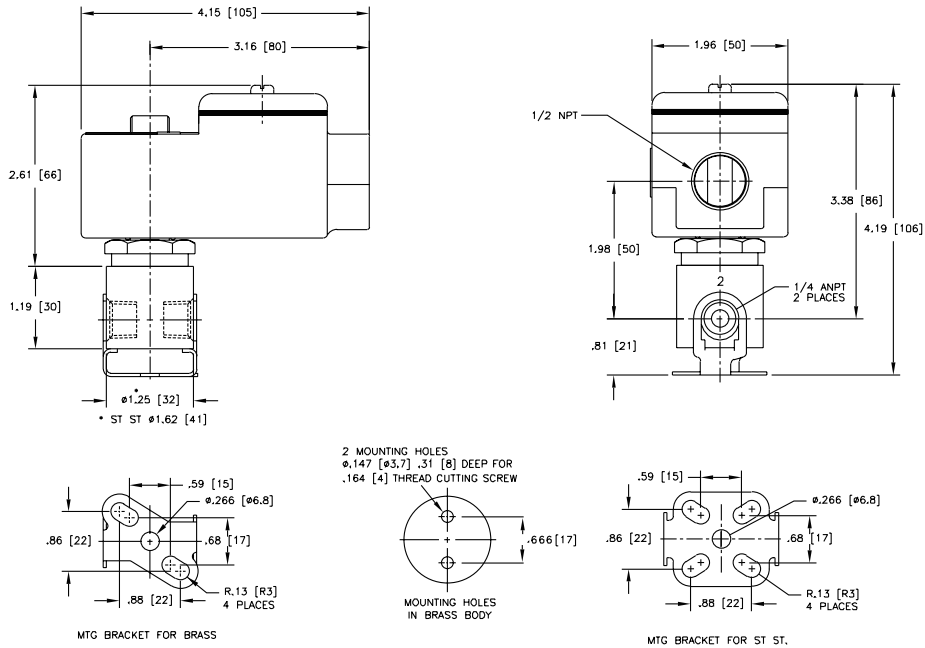

Const. Ref. 2

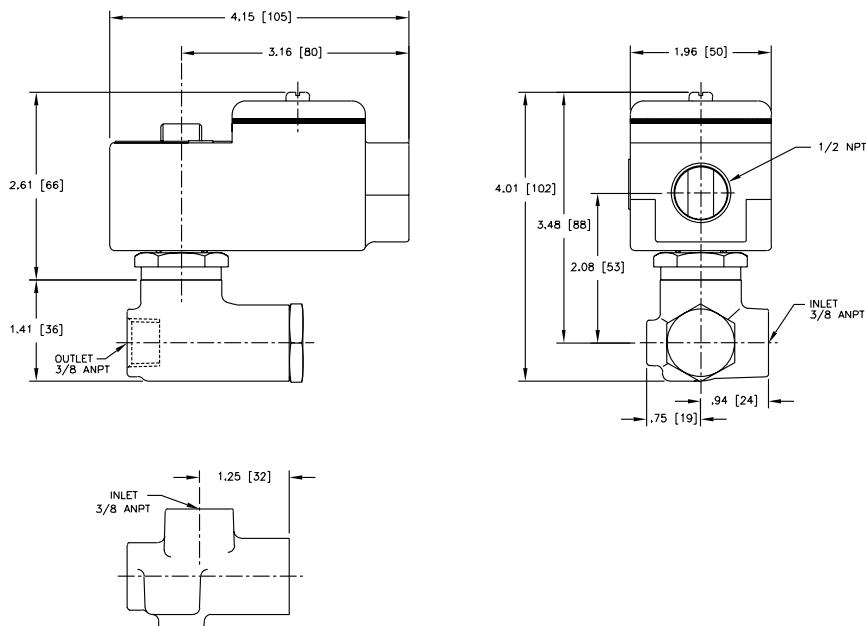


SPECIAL SERVICE  
PILOT




Dimensions: inches (mm)

Const. Ref. 5

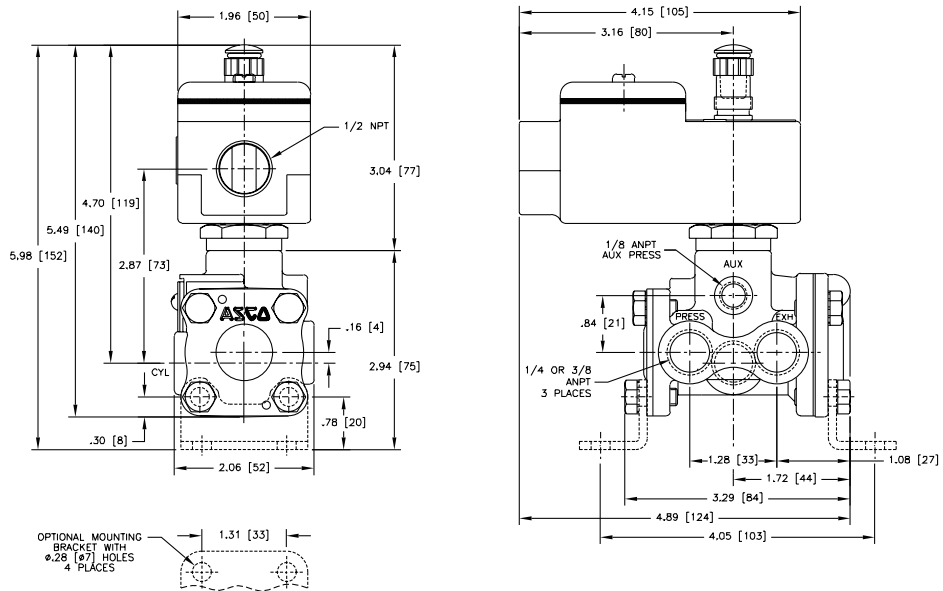


Const. Ref. 6

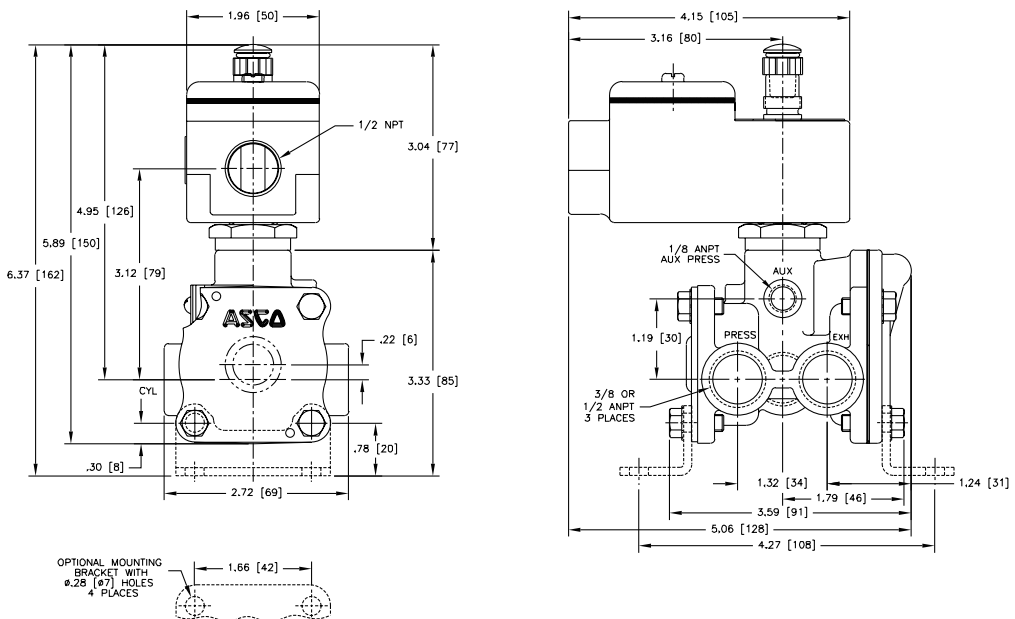

SPECIAL SERVICE  
PILOT


**Dimensions: inches (mm)**

**Const. Ref. 7, 7A**

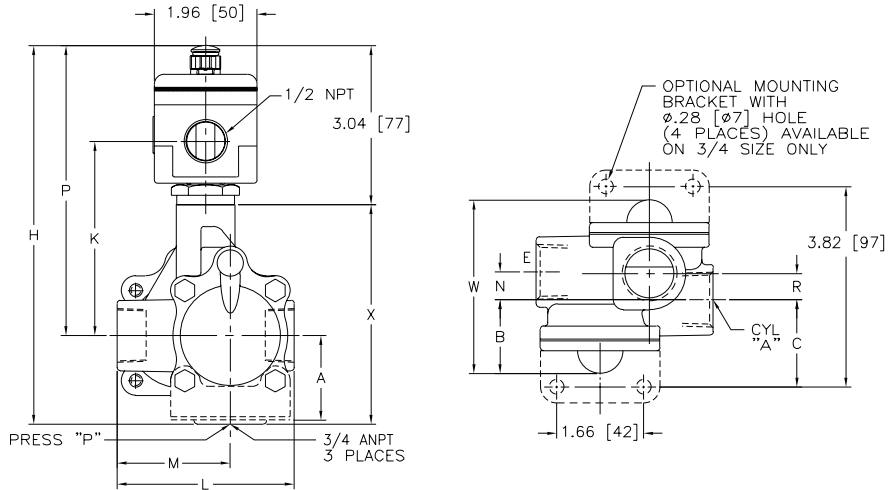

Catalog No.		A	B	C	H	K	L	M	N	P	R	W	X
WBEE8316A374	ins.	1.61	1.41	1.66	7.23	3.71	3.38	2.16	.53	5.54	.50	3.31	4.19
	mm	41	36	42	184	94	86	55	13	141	13	84	106
WBEE8316A334	ins.	-	1.78	-	7.85	3.96	4.44	2.81	.87	5.79	1.74	5.32	4.81
	mm	-	45	-	199	100	113	71	22	147	44	135	122

**Const. Ref. 8**




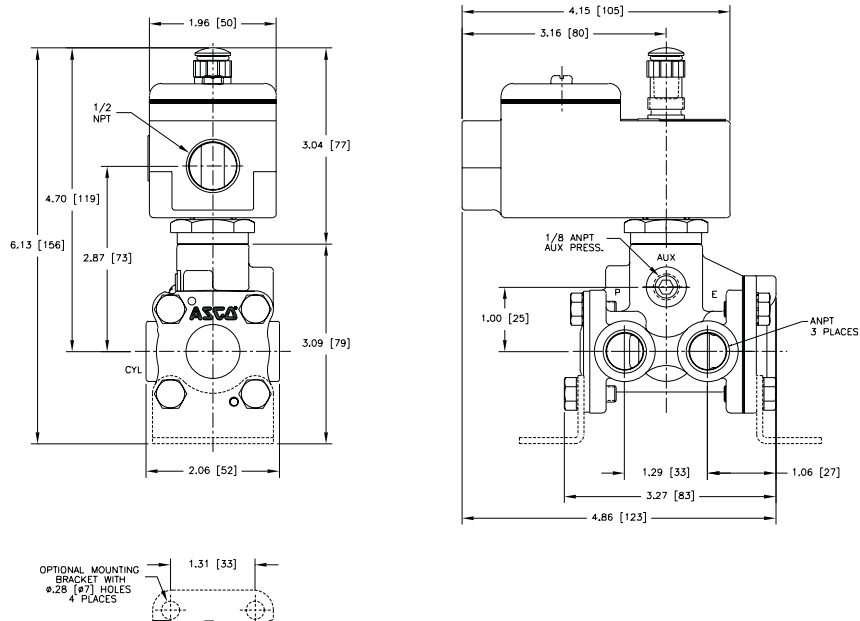


SPECIAL SERVICE PILOT




Dimensions: inches (mm)

Const. Ref. 9

Refer to note ⑥.  
For all 8316 "0" Minimum Series only.

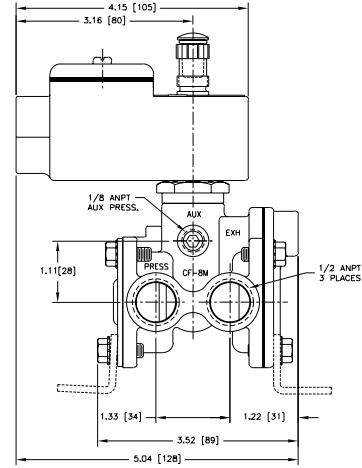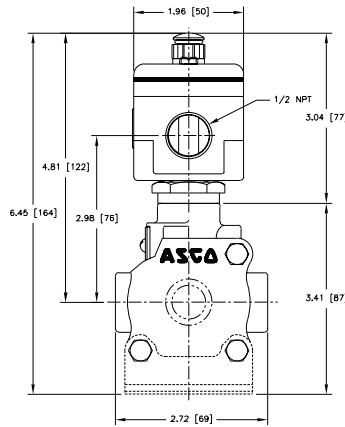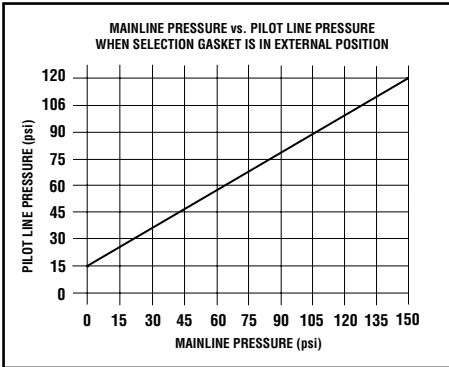


Const. Ref. 10

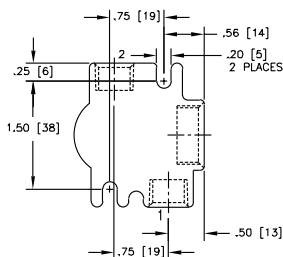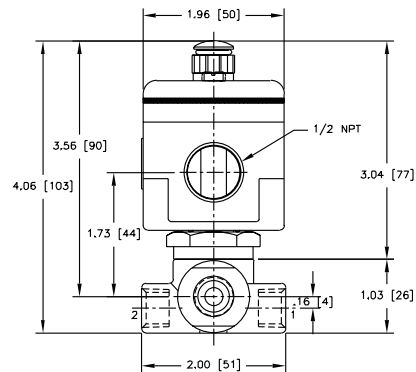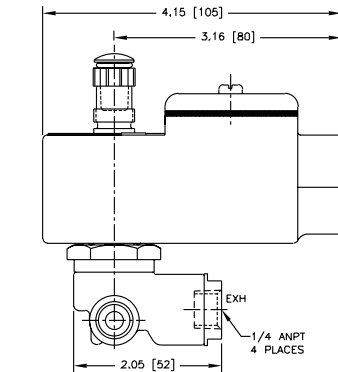


**Dimensions: inches (mm)**

**Const. Ref. 11**

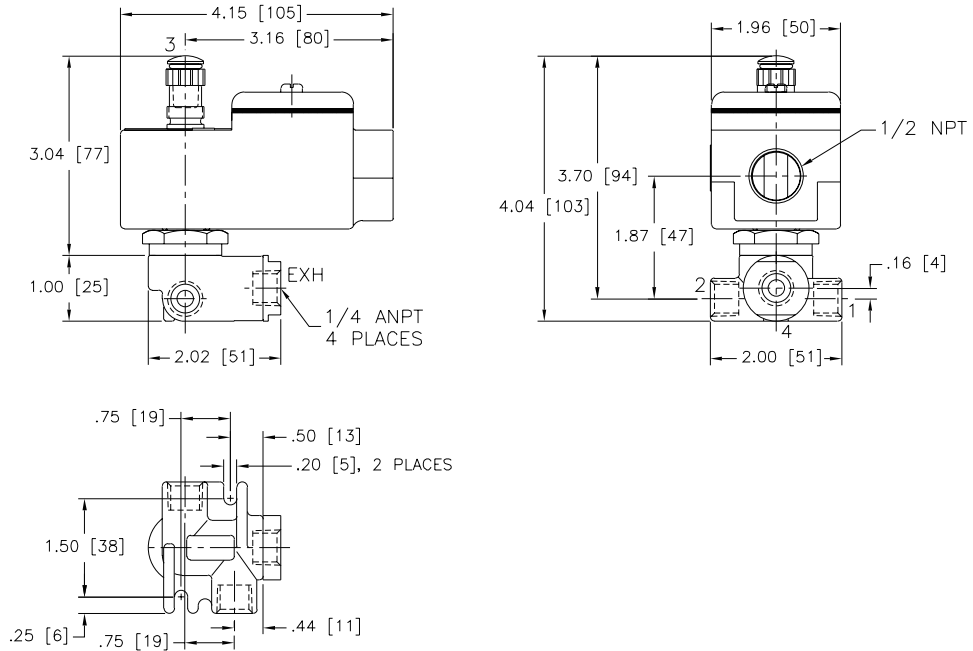


**Const. Ref. 12**

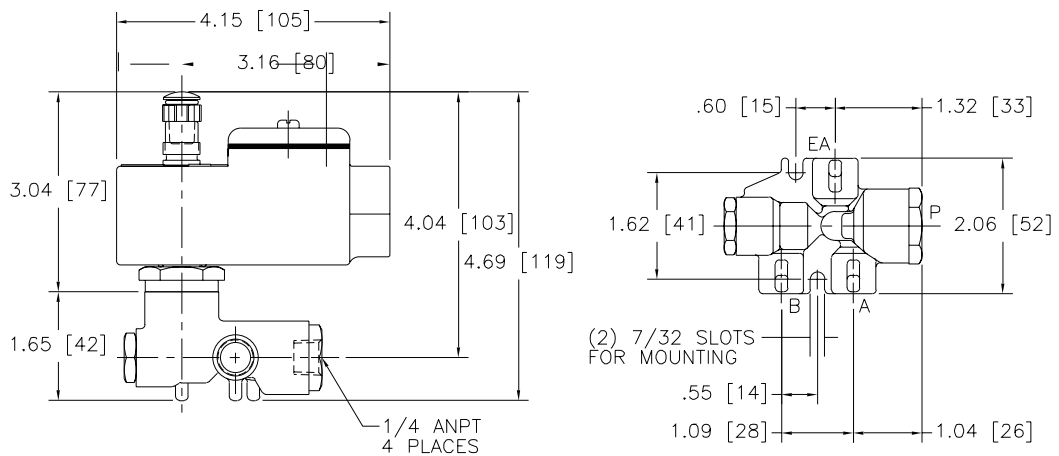


Dimensions: inches (mm)

Const. Ref. 13-18


13-15

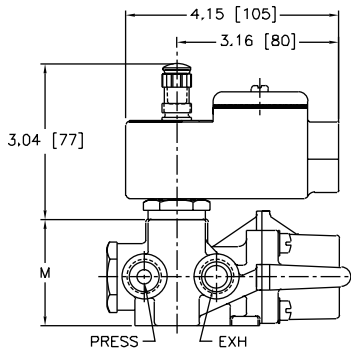

16-18

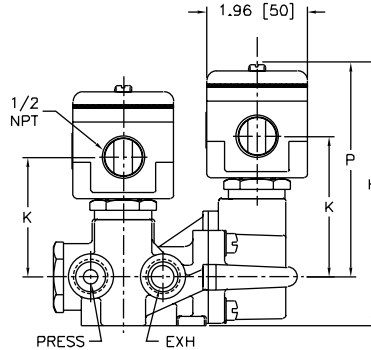

All

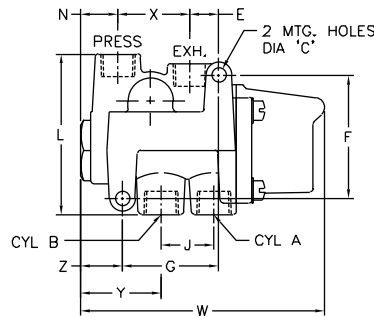





Catalog No.		ØC	E	F	G	H	J	K	L	M	N	P	W	X	Y	Z	Exhaust Pipe Size
WBEE8344A370	ins.	.28	.56	2.41	1.88	5.12	1.03	2.33	3.13	2.08	.72	4.16	4.75	1.41	1.56	.81	3/8"
	mm	7.1	14	61	48	130	26	59	80	53	18	106	121	36	40	21	
WBEE8344A380, 382	ins.	.34	.77	3.12	2.62	5.72	1.50	2.77	3.18	2.06	.83	4.60	6.06	1.86	1.90	.84	1/2"
	mm	8.6	20	79	67	145	38	70	81	52	21	117	154	47	48	21	
WBEE8344A372, 374	ins.	.34	.77	3.12	2.62	5.10	1.50	2.14	3.18	2.06	.83	3.98	6.06	1.86	1.90	.84	1/2"
	mm	8.6	20	79	67	120	38	54	81	52	21	101	154	47	48	21	
WBEE8344A344	ins.	.28	.56	2.41	1.88	5.12	1.03	2.74	3.13	2.08	.72	4.16	4.75	1.41	1.56	.81	3/8"
	mm	7.1	14	61	48	130	26	70	80	53	18	106	121	36	40	21	
WBEE8344A376, 378	ins.	.34	1.37	3.81	3.88	5.90	2.09	2.52	4.56	2.86	1.55	4.35	8.25	2.12	2.63	1.16	1"
	mm	8.6	35	97	99	150	53	64	116	73	39	110	210	54	67	30	
WBEE8344A354, 356	ins.	.34	1.37	3.81	3.88	6.54	2.09	3.21	4.56	2.81	1.55	4.35	8.25	2.12	2.63	1.16	1"
	mm	8.6	35	97	99	168	53	81	116	71	39	110	210	54	67	30	

IMPORTANT: Valves can be mounted in any position.

## Dimensions: inches (mm)





Series	8551	8553
NPT	1/4	1/2
L1 ①	5.12 (132)	6.00 (153)
L2 ①	6.73 (171)	7.80 (198)
H2	4.38 (111)	4.77 (121)
H1	1.10 (28)	1.58 (40)
W	1.77 (45)	2.85 (72)

① Manual override option MH adds .250" (6.4),  
MS option adds .468" (11.9) to each solenoid endcap.


Optional Manual Operators		
Add Suffix		Description
MO		Push and turn to lock with flat head screwdriver slot
MI		Momentary push in with flat head screwdriver slot
MH		Momentary push in by hand
MS		Push and turn to lock by hand

Series	8551	8553
NPT	1/4	1/2
L1 ①	5.63 (144)	7.06 (180)
L2 ①	7.20 (183)	8.86 (225)
H2	4.38 (111)	4.77 (121)
H1	1.10 (28)	1.58 (40)
W	1.77 (45)	2.85 (72)


① Manual override option MH adds .250" (6.4),  
MS option adds .468" (11.9) to each solenoid endcap.

Optional Manual Operators		
Add Suffix		Description
MO		Push and turn to lock with flat head screwdriver slot
MI		Momentary push in with flat head screwdriver slot
MH		Momentary push in by hand
MS		Push and turn to lock by hand

Const. Ref. 19

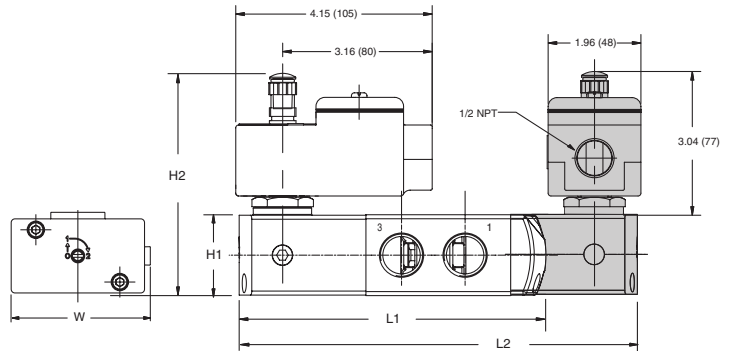





Const. Ref. 20

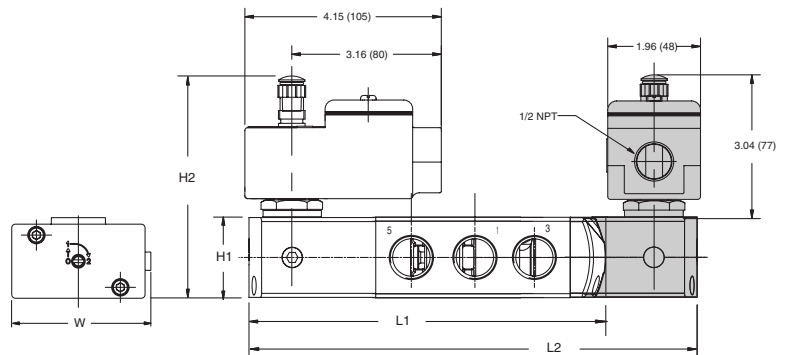

Dimensions: inches (mm)





Series	8551 (Aluminum, Brass)
NPT	1/4
L1 ①	4.96 (126)
L2 ①	6.49 (165)
H2	4.38 (111)
H1	1.57 (40)
W	1.77 (45)

① Manual override option MH adds .250" (6.4), MS option adds .468" (11.9) to each solenoid endcap.


Optional Manual Operators		
Add Suffix		Description
MO		Push and turn to lock with flat head screwdriver slot
MI		Momentary push in with flat head screwdriver slot
MH		Momentary push in by hand
MS		Push and turn to lock by hand

Series	8551 (316L SS)	8551 (5/3)	8553
NPT	1/4	1/4	1/2
L1 ①	5.20 (132)	-	7.08 (180)
L2 ①	6.73 (171)	7.44 (189)	8.85 (225)
H2	4.38 (111)	4.38 (111)	4.77 (121)
H1	1.57 (40)	1.57 (40)	2.08 (53)
W	1.77 (45)	1.77 (45)	2.87 (73)


① Manual override option MH adds .250" (6.4), MS option adds .468" (11.9) to each solenoid endcap.

Optional Manual Operators		
Add Suffix		Description
MO		Push and turn to lock with flat head screwdriver slot
MI		Momentary push in with flat head screwdriver slot
MH		Momentary push in by hand
MS		Push and turn to lock by hand


Const. Ref. 21

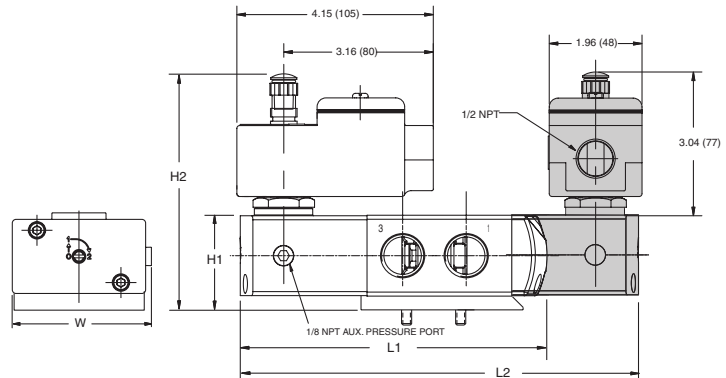


8551 NAMUR Footprint



Const. Ref. 22

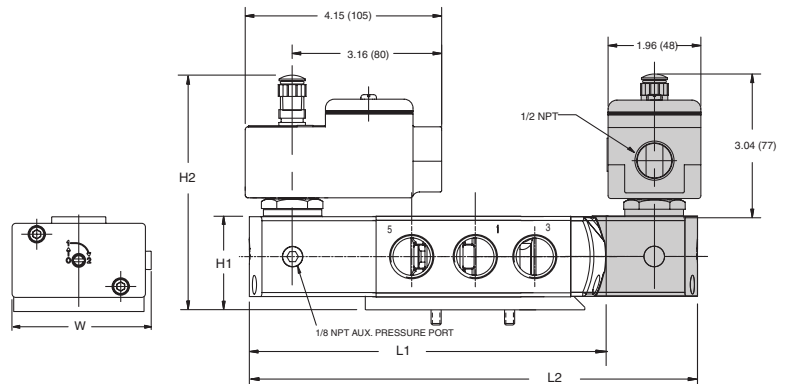

8553 NAMUR Footprint

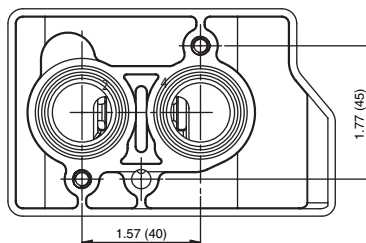

8551 NAMUR Footprint

